

9,000 - 10,000# Dexter Torflex Axles Assembly #T100 GD (General Duty - Single Wheel Only)

Made to Order



Information

Hubs and Axles

Brake Assemblies

Suspensions & Fasteners

Tires & Wheels

Couplers, Jacks & Winches

Hitches & Towing Accessories

Body Components

Trailer Parts

Lights & Electrical

Cargo Control

Brake Actuating Systems

Switches

Features and Options	
Tubing	3.63" Square
Bearings	#387A Inner & #25580 Outer
Hub	8 Lug on 6.5" (5/8" studs)
Brake	12-1/4" x 3-3/8" Electric 12-1/4" x 3-3/8" Hydraulic <i>*duo servo, ABS also available on hydraulic brake</i>
Suspension	Rubber Torsion
Lubrication	Grease/Oil Bath


Note
<p>Minimum: 22.70" Maximum: 34.40"</p> <p>Hub Face (A) minus Frame Width (B) must be between the Min. and Max.</p>



Articulation Dimensions

Dimensions are for high profile, top mount only. Side mount is .31" higher. Allow 3" bump clearance from full load.

Start Angle	Bracket Type	No Load		Full Load		Shock Load	
		H	L	H	L	H	L
45° down	Hi-Profile	7.18	4.24	5.24	5.54	4.24	5.86
22.5° down	Hi-Profile	5.24	5.54	2.94	6.00	1.90	5.91
10° down	Hi-Profile	3.98	5.91	1.64	5.86	0.64	5.54
0°	Hi-Profile	2.94	6.00	0.64	5.54	-0.28	5.06
10° up	Hi-Profile	1.90	5.91	-0.28	5.06	-1.11	4.42
22.5° up	Hi-Profile	0.64	5.54	-1.30	4.24	-1.97	3.44




OVERHANG PER SIDE			
Spindle	Min.	Max.	Brake
13D	12.25"	17.20"	12 1/4 x 4"
13G	11.35"	17.20"	12 1/4 x 3 3/8"

Note: Positive numbers in the H column indicate the spindle is BELOW the top of the bracket. Conversely, negative numbers are ABOVE the top of the bracket.

Full Load Dimensions

Dimensions are for high profile, top mount only. Side mount is .31" higher. Allow 3" bump clearance from full load.

Tire	START ANGLE																			
	45° Down			22.5° Down			10° Down			0°			10° Up			22.5° Up				
	H	B	C	H	B	C	H	B	C	H	B	C	H	B	C	D	E			
10R17.5HC	5.2	20.2	13.4	2.9	17.9	15.7	1.6	16.6	17.0	.6	15.6	18.0	-0.3	14.6	18.9	-1.3	13.6	19.9	15.6	18.0
215/75R17.5	5.2	18.6	10.8	2.9	16.3	13.1	1.6	15.0	14.4	.6	14.0	15.4	-0.3	13.0	16.3	-1.3	12.0	17.3	14.0	15.3
12-16.5LT	5.2	19.5	11.3	2.9	17.2	13.6	1.6	15.9	14.9	.6	14.9	15.9	-0.3	13.9	16.8	-1.3	12.9	17.8	14.9	15.8
9.50-16.5LT	5.2	18.7	10.6	2.9	16.4	12.9	1.6	15.1	14.2	.6	14.1	15.2	-0.3	13.1	16.1	-1.3	12.1	17.1	14.1	15.2
9R17.5HC	5.2	20.0	12.5	2.9	17.7	14.8	1.6	16.4	16.1	.6	15.4	17.1	-0.3	14.4	18.0	-1.3	13.4	19.0	15.4	17.1

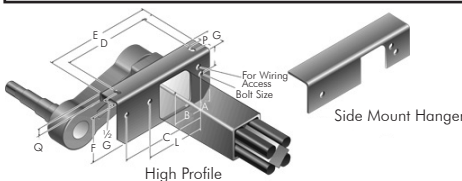

#13D & 13G BRACKET DIMENSIONS													
A	B	C	D	E	F	G	H	J	L	P	Q	Bolt Size	Tube Size
1.22	3.63	10.56	10.56	10.56	13.00	5.50	2.50	2.25	7.26	1.00	1.00	5/8" bolt	3.88

These axles available on request