



### 4,000 - 7,000# AL-KO Rubber Suspension Axles


Made to Order



| Type | Capacity Max | Min A* | Max A* | Min B | Max B | C   | D   | E   | F** | G   | H   | J   |
|------|--------------|--------|--------|-------|-------|-----|-----|-----|-----|-----|-----|-----|
| H-52 | 5,200        | 7.0    | 11.0   | 8.2   | 12.2  | 2.4 | 9.8 | .69 | 8.0 | 4.9 | 3.0 | 6.0 |
| H-60 | 6,000        | 7.0    | 11.0   | 8.2   | 12.2  | 2.4 | 9.8 | .69 | 8.0 | 4.9 | 3.0 | 6.0 |
| H-70 | 7,000        | 7.0    | 10.5   | 8.2   | 11.7  | 2.4 | 9.8 | .69 | 8.0 | 4.9 | 3.0 | 6.0 |


Note: \* Add 1" to min. for side mount brackets turned outward.

\*\* Side mount holes optional, specify when ordering.

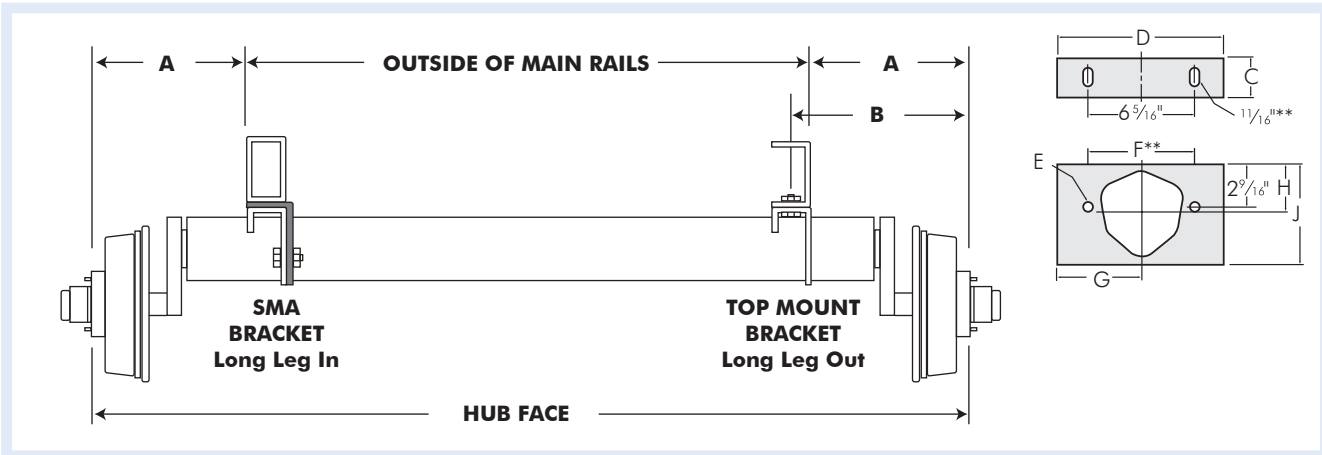

|                            | Start Angle | A        |            |            | B        |            |            |
|----------------------------|-------------|----------|------------|------------|----------|------------|------------|
|                            |             | Unloaded | Rated Load | Shock Load | Unloaded | Rated Load | Shock Load |
| <b>H-52</b><br><b>H-60</b> | +40         | 6.9      | 4.9        | 3.4        | 4.6      | 5.6        | 6.0        |
|                            | +20         | 5.0      | 2.7        | 0.8        | 5.6      | 6.0        | 5.5        |
|                            | +10         | 4.0      | 1.5        | (0.1)      | 5.9      | 5.8        | 5.0        |
|                            | 0           | 3.0      | 0.6        | (0.9)      | 6.0      | 5.5        | 4.6        |
|                            | -10         | 2.0      | (0.4)      | (1.5)      | 5.9      | 5.0        | 4.2        |
| <b>H-70</b>                | -20         | 1.0      | (1.1)      | (2.4)      | 5.6      | 4.6        | 3.5        |
|                            | +25         | 5.5      | 3.0        | 1.4        | 5.4      | 6.0        | 5.7        |
|                            | 0           | 3.0      | 0.6        | (0.9)      | 6.0      | 5.5        | 4.6        |
|                            | -20         | 1.0      | (1.1)      | (2.4)      | 5.6      | 4.6        | 3.5        |

Note: Figures in ( ) indicate spindle center above top of bracket.

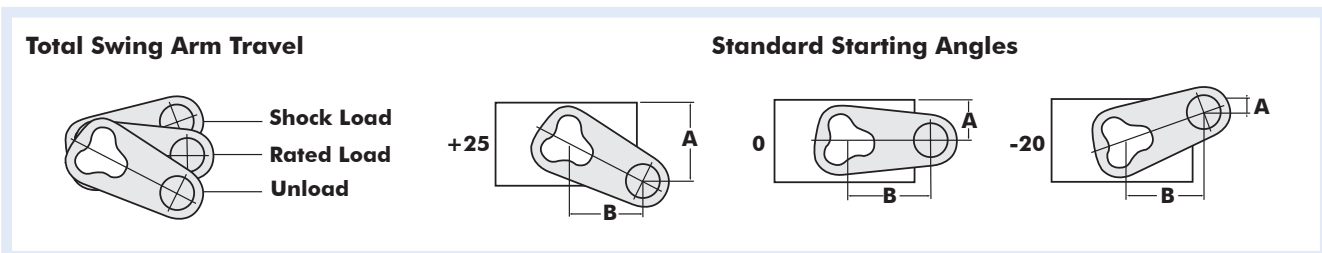

These axles available on request

Information

Hubs and Axles

Brake Assemblies

Suspensions & Fasteners

Tires & Wheels

Couplers, Jacks & Winches

Hitches & Towing Accessories

Body Components

Boat Trailer Parts

Lights & Electrical

Locks & Cargo Control

Brake Actuating Systems

Switches