

Information




## 10,000# (Heavy Duty) Dexter Sprung Axles Assembly

Made to Order

Overhang = (Hub Face - Spring Center)

Features and Options	
<b>Tubing</b>	5" OD - .250 Wall 5" OD - .44 Wall (required on air ride)
<b>Bearings</b>	#385S Inner & #387 Outer
<b>Hub</b>	8 Lug on 6.5"
<b>Brake</b>	12-1/4" x 4" Electric 12-1/4" x 4" Hydraulic 12-1/4" x 4" Air Hydraulic Disc <i>*duo servo, ABS also available on hydraulic brake and air brake</i>
<b>Suspension</b>	Slipper Spring - 2.5" Wide Hanger Kit
<b>Lubrication</b>	Oil Bath (standard) or Grease (optional)

Axle Type	Min.	Max.
<b>Straight (single wheel)</b>	<b>25.37"</b>	<b>31.00"</b>
<b>Straight (dual wheel)</b>	<b>26.00"</b>	<b>31.00"</b>
<b>Straight (optional)</b>	<b>26.00"</b>	<b>49.00"</b>

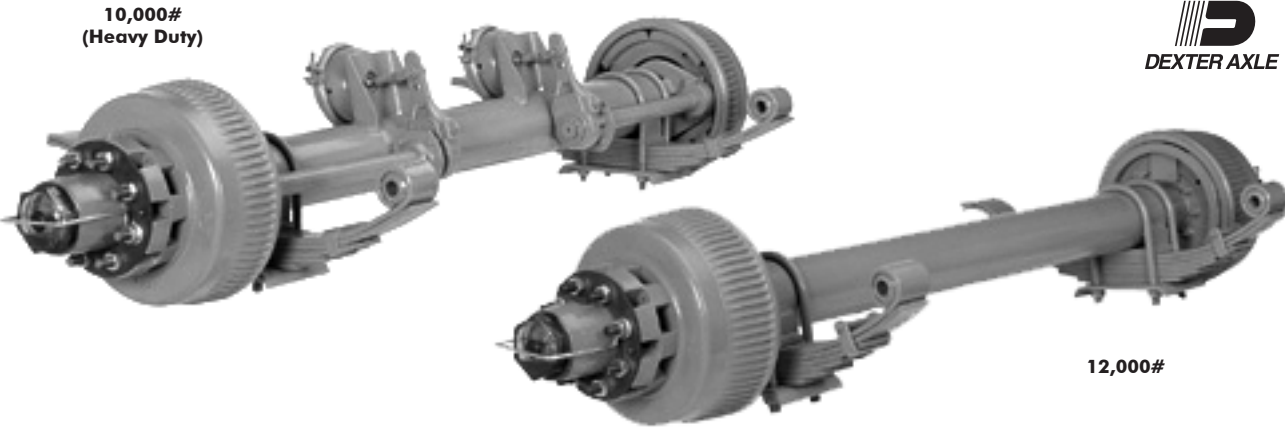

## 12,000# Dexter Sprung Axles Assembly

Made to Order

Overhang = (Hub Face - Spring Center)

Features and Options	
<b>Tubing</b>	5" OD - .44 Wall
<b>Bearings</b>	#3984 Inner & #28682 Outer
<b>Hub</b>	8 Lug on 6.5" Low profile hubs for 14.5" wheels High profile hubs for use with 16" & 16.5" wheels
<b>Brake</b>	12-1/4" x 5" Electric 12-1/4" x 5" Hydraulic 12-1/4" x 5" Air Hydraulic Disc <i>*duo servo, ABS also available on hydraulic brake and air brake</i>
<b>Suspension</b>	Slipper Spring - 3" Wide Hanger Kit
<b>Lubrication</b>	Oil Bath (standard) or Grease (optional)

Axle Type	Min.	Max.
<b>Straight (low profile hub)</b>	<b>32.50"</b>	<b>41.00"</b>
<b>Straight (high profile hub)</b>	<b>26.50"</b>	<b>41.00"</b>

**These axles available on request**

