



Trailer Tires



Part #	Tire Size	LR	Rating	Capacity	Dimensions	Note
10001	480 x 8	B	4	590 lbs	16.6 OD - 4.8 W	-
10005	570 x 8	B	4	715 lbs	18.5 OD - 5.8 W	-
10008	570 x 8	C	6	910 lbs	18.5 OD - 5.8 W	-
◇ 10017	18 x 8.5 x 8	BNHS	4	815 lbs	17.7 OD - 8.4 W	GOLF CART
10018	18.5 x 8.5 x 8	B	4	770 lbs	18.2 OD - 8.4 W	-
10019	18.5 x 8.5 x 8	C	6	940 lbs	17.7 OD - 8.5 W	Carlisle
10024	20.5 x 8 x 10	C	6	1,105 lbs	20.6 OD - 8.2 W	-
10025-C	20.5 x 8 x 10	D	8	1,330 lbs	20.6 OD - 8.2 W	Carlisle
10026	20.5 x 8 x 10	E	10	1,535 lbs	20.6 OD - 8.2 W	-
10026-C	20.5 x 8 x 10	E	10	1,535 lbs	20.6 OD - 8.2 W	Carlisle
10031	480 x 12	B	4	780 lbs	20.5 OD - 4.8 W	-
10032	480 x 12	C	6	990 lbs	20.5 OD - 4.8 W	-
10033	530 x 12	B	4	840 lbs	21.6 OD - 5.3 W	-
10036	530 x 12	C	6	1,045 lbs	21.6 OD - 5.3 W	-
10054	ST175/80D13	B	4	1,100 lbs	24.0 OD - 6.9 W	B78 - 13B
10056	ST175/80D13	C	6	1,360 lbs	24.0 OD - 7.1 W	B78 - 13C
10056-C	ST175/80D13	C	6	1,315 lbs	24.2 OD - 6.8 W	Carlisle
10059	ST175/80D13	C	6	1,315 lbs	25.0 OD - 6.7 W	USA Trail
10053	ST175/80R13	C	6	1,360 lbs	24.1 OD - 6.7 W	Radial-Carlisle
10058	ST185/80D13	C	6	1,480 lbs	24.5 OD - 6.6 W	-
10062	ST205/75D14	C	6	1,760 lbs	26.1 OD - 8.0 W	F78 - 14C
10062-C	ST205/75D14	C	6	1,760 lbs	26.1 OD - 8.0 W	Carlisle
10065	ST205/75D14	C	6	1,760 lbs	26.9 OD - 8.1 W	USA Trail
10064	ST205/75R14	C	6	1,760 lbs	26.1 OD - 8.0 W	Radial
10064-C	ST205/75R14	C	6	1,760 lbs	26.1 OD - 8.0 W	Radial Carlisle
10064-G	ST205/75R14	C	6	1,760 lbs	26.1 OD - 8.0 W	Radial-Goodyear
10063	ST215/75D14	C	6	1,870 lbs	26.8 OD - 7.9 W	G78-14C
10063-C	ST215/75D14	C	6	1,870 lbs	26.8 OD - 7.9 W	Carlisle
10061	ST215/75R14	C	6	1,870 lbs	26.7 OD - 8.5 W	Radial
10061-C	ST215/75R14	C	6	1,870 lbs	26.7 OD - 8.5 W	Radial Carlisle
10061-G	ST215/75R14	C	6	1,870 lbs	26.7 OD - 8.5 W	Radial-Goodyear
10069	8 x 14.5 LT	F	12	2,790 lbs	28.0 OD - 8.1 W	-

Note: ◇ = GOLF CART TIRE, NOT FOR HI-WAY USE
More Types and Sizes Available by Special Order

Continued On Next Page »»





Trailer Tires (Continued)

Part #	Tire Size	LR	Rating	Capacity	Dimensions	Note
10070	ST205/75D15	C	6	1,820 lbs	27.13 OD - 8.46 W	F78 - 15C
10070-C	ST205/75D15	C	6	1,820 lbs	27.13 OD - 8.46 W	Carlisle
10073	ST205/75D15	C	6	1,820 lbs	27.10 OD - 8.00 W	USA Trail
10071	ST205/75R15	C	6	1,820 lbs	27.10 OD - 8.00 W	Radial
10831	ST205/75R15	C	6	1,820 lbs	27.20 OD - 8.00 W	Radial-Carlisle
10071-G	ST205/75R15	C	6	1,820 lbs	27.20 OD - 8.00 W	Radial-Goodyear
10072	ST225/75D15	C	6	2,150 lbs	28.31 OD - 9.33 W	H78 - 15C
10074	ST225/75R15	C	6	2,150 lbs	28.30 OD - 8.80 W	Radial-Goodyear
10076	ST225/75D15	D	8	2,540 lbs	28.31 OD - 9.33 W	H78 - 15D
10076-C	ST225/75D15	D	8	2,540 lbs	28.31 OD - 9.33 W	Carlisle
10077	ST225/75D15	D	8	2,540 lbs	28.60 OD - 9.00 W	USA Trail
10075	ST225/75R15	D	8	2,540 lbs	28.30 OD - 8.80 W	Radial
10075-C	ST225/75R15	D	8	2,540 lbs	28.30 OD - 8.80 W	Radial-Carlisle
10075-G	ST225/75R15	D	8	2,540 lbs	28.30 OD - 8.80 W	Radial-Goodyear
10824	ST225/75R15	E	10	2,830 lbs	28.30 OD - 8.80 W	Radial-Carlisle
10093	750 x 16 LT	E	10	2,780 lbs	31.9 OD - 9.0 W	-
10092	LT235/85R16	E	10	3,042 lbs	31.9 OD - 9.1 W	Radial
10092-C	ST235/85R16	D	10	3,200 lbs	31.74 OD - 9.20 W	Radial-Carlisle
10841	ST235/80R16	E	10	3,520 lbs	31.9 OD - 9.1 W	Radial
10099	LT235/85R16	G	14	3,750 lbs	31.9 OD - 9.1 W	Radial
10094	875 x 16.5 LT	E	10	2,680 lbs	29.7 OD - 8.7 W	-



Understanding Tire Markings

Original Equipment Approval Code

All tires must have a DOT, Department of Transportation numbers which indicate that the tire has passed all minimum DOT standards.


Uniform Tire Quality Grading (UTQG) Marking

The Department of Transportation requires each manufacturer to grade its tires under the Uniform Tire Quality Grade (UTQG) labeling system and establish ratings for treadwear, traction, and temperature resistance. These test are conducted independently by each manufacturer following government guidelines to assign values that represent a comparison between the tested tire and a control tire. While traction and temperature resistance ratings are specific performance levels, the treadwear ratings are assigned by manufacturers following field testing and are most accurate when comparing tires of the same brand.

Tire Size Markings

The tire size shown above is 225/50R16. The 225 represents its section width (tire width in mm). "50" is the tires "Aspect Ratio" (the ratio of the sidewall height to the tread width). The "R" represents tire construction, in this case radial, and the last item is the "16" which represents the rim/wheel size.

Below are the tire markings most commonly seen on tires sold in the US. All tires must have a US Department of Transportation (D.O.T.) approval.

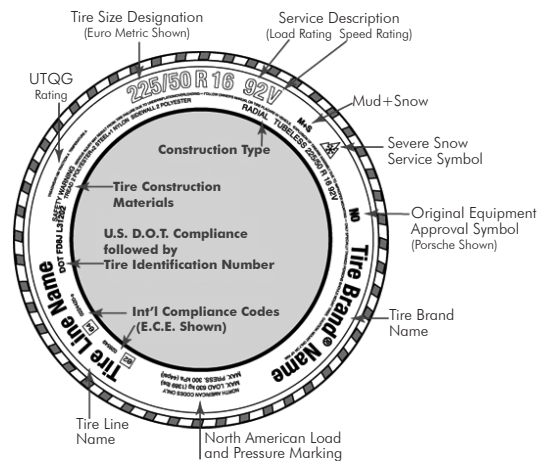

Information

Hubs and Axles

Brake Assemblies

Suspensions & Fasteners

Tires & Wheels

Couplers, Jacks & Winches

Hitches & Towing Accessories

Body Components

Boat Trailer Parts

Lights & Electrical

Cargo Control

Brake Actuating Systems

Switches