


Information



Dutton-Lainson Winches - 2 Speed with Straps

Part #	Description	Capacity
3520-S	2 Speed, Strap installed - 25' Strap	2,000 lbs
3525-S	2 Speed, Strap installed - 25' Strap	2,500 lbs

Hubs and Axles

Brake Assemblies

Suspensions & Fasteners

Tires & Wheels

Couplers, Jacks & Winches

Hitches & Towing Accessories

Body Components

Boat Trailer Parts


Lights & Electrical

Locks & Cargo Control

Brake Actuating Systems

Switches

Dutton-Lainson Company's Pulling Winches - Zinc Plated

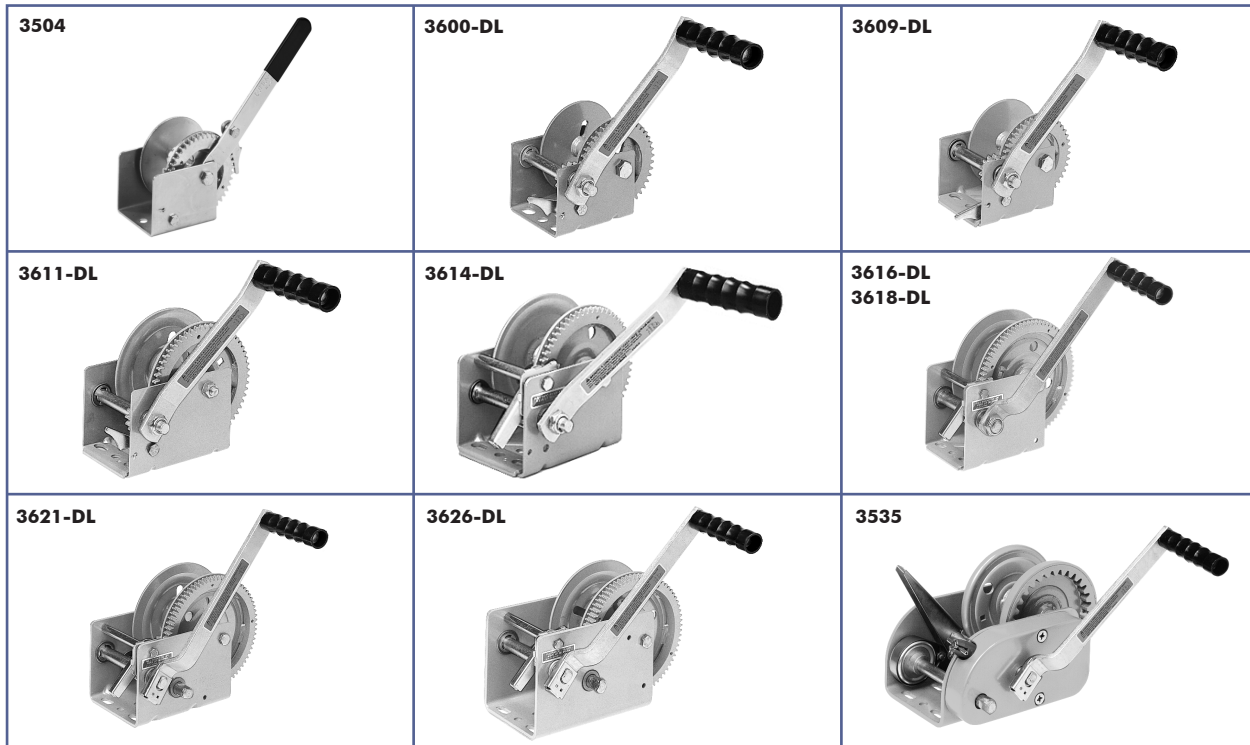

Winch Series	Part #	MFG's #	Rated Capacity(2)	Drum Hub Dia.	Gear Ratio	Handle Length	Max Mech. Adv.	Reversible Ratchet	2-Speed Operation	Maximum Drum Capacity	
										Cable (3)	Strap
Standard Duty	3504	DL400	400 lbs	5/8"	1:1	7"	18			5/32" x 56'	15'
	3600-DL	DL600A	600 lbs	5/8"	3.2:1	7"	57			5/32" x 61'	15'
	3609-DL	DL900A	900 lbs	5/8"	3.2:1	7"	55			3/16" x 40'	15'
Medium Duty	3611-DL	DL1100A	1,100 lbs	7/8"	3.7:1	7"	49			3/16" x 79'	30'
	3614-DL	DL1402A	1,400 lbs	7/8"	4.1:1	9 1/2"	74	•		1/4" x 40'	30'
	3616-DL	DL1602A	1,600 lbs	1 1/8"	5.4:1	9 1/2"	75	•		1/4" x 58'	40'
	3618-DL	DL1802A	1,800 lbs	1 1/8"	5.4:1	9 1/2"	73	•		9/32" x 58'	40'
Heavy Duty	3621-DL	DL2000A	2,000 lbs	1 1/8"	12.4:1/5.4:1	9 1/2"	168	•	◇	9/32" x 58'	40'
	3626-DL	DL2500A	2,500 lbs	1 1/8"	17.3:1/5.4:1	9 1/2"	229	•	◇	5/16" x 47'	40'
	3530	DL3200A	3,200 lbs	1 1/8"	17.3:1/5.4:1	9 1/2"	219	•	◇	3/8" x 30'	-
	3535	DL3500B (1)	3,500 lbs	1 5/16"	12:1/6:1	9 1/2"	135	•	◇	3/8" x 37'	-

(1) Hand brake standard equipment.

(2) Capacity based on direct line pull on the third layer of line on the drum. Capacity is reduced as the line builds up on the drum.

(3) Drum capacity shown is based on cable size listed. (Cable not included.)

